



TRAY AND CARTON ERECTOR F60

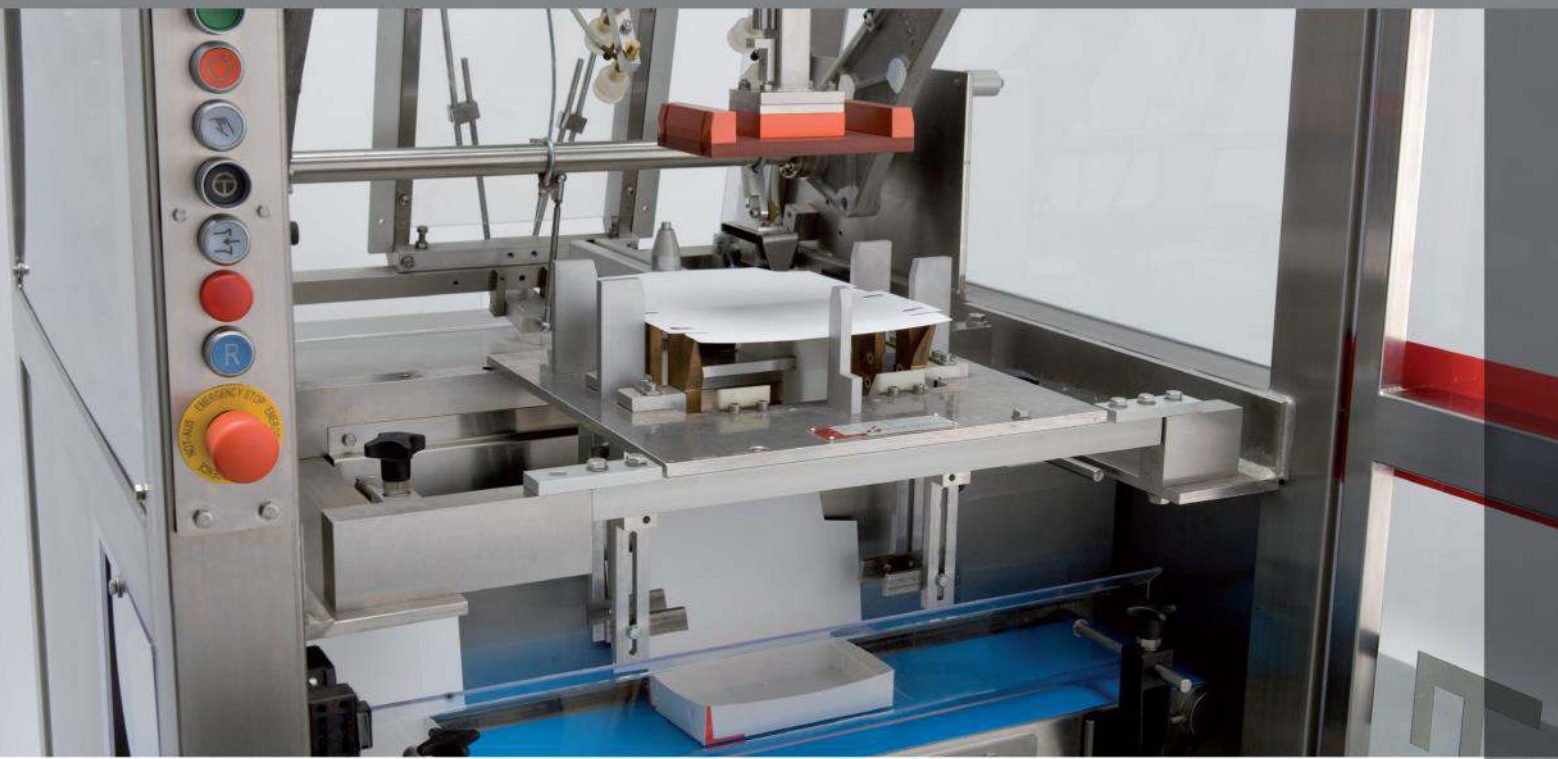

- COMPACT
- SPEED UP TO 50 CARTONS PER MINUTE
- EASY TO USE AND MAINTAIN
- EASY AND QUICK SIZE CHANGE OVER
- SUITABLE FOR DUPLEX AND CORRUGATED BOARD

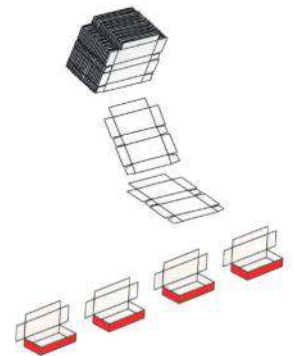

SCHUT SYSTEMS bv

Loubergweg 22
NL 6961 EK Eerbeek

T +31 (0)313 674 500
F +31 (0)313 674 550
E info@schutsystems.com

Food Automation Pty Ltd
PO Box 3242 Newton
South Australia 5074
T: +61 427 565 658
E: chris@foodautomation.com.au
W: www.foodautomation.com.au

schutsystems.com



TRAY AND CARTON ERECTOR F60

The **tray and carton erecting machine F60** forms carton blanks by using a mechanical locking instead of glue. It's a very compact mechanically operated machine. Care has been taken regarding reliability, easy access for operators, maintenance and service. The electrical cabinet is integrated in the machine. The machine is in stainless steel execution and built for 24-hours operation.

The F60 can operate as a stand alone machine as well as in a packaging line in combination with for example the S600 carton closing machine. It is an extremely flexible machine that can easily be adapted to your demands.

Photo above

The tools are easy accessible and quickly changeable. Changeover time approx. 5 minutes

Photo left above

The plunger is secured

TECHNICAL CHARACTERISTICS

Speed	Up to 50 cartons p/min. (Question to carton size and carton construction)
Supply voltage	400V, 3 phase Pe and neutral, 50 Hz
Control voltage	24V DC
Power demand	2,1 kW
Directive	Low Voltage (LVD) (2014/35/EC) EMC Directive (2014/30/EC) Machinery Directive (MD) (2006/42/EC)
Machine size	1032 x 1179/1235 x 2385 mm
Weight	800 kg
Optional	Queue control Right or left outfeed of cartons Outfeed belt conveyor Blow unit Discharge control photocell

Other options on request

